

SM20 SUBMERSIBLE PUMP

STANLEY®



SPECIFICATIONS

Capacity	2½" NPTF Discharge
Performance	250 gpm / 946 lpm
Flow Range	4-9 gpm / 15-34 lpm
Working Pressure	1000-2000 psi / 70-140 bar
Full Relief Setting	2250 psi / 155 bar
Weight	13.7 lbs / 6.3 kg
Length	7½" / 19 cm
Width	9.6" / 24 cm
Hydraulic Ports	-8 SAE O-ring
Connection	¾" Male Pipe Adapter
Couplers	Yes
Hose Whips	No




The **SM20** Submersible Pump is a light weight, self priming hydraulic dewatering pump with 2½" NPFT discharge. With a capacity of 250 gpm, this pump is good for quick dewatering jobs. The **SM20** is the smallest pump in our line up of five different models. See chart below for **SM20** gpm capacity.

FEATURES

- Stanley Hyrevz gear motor
- Stainless Steel fasteners
- Submersible and Self Priming
- Can run dry without damage
- Urethane or steel impeller
- 250 gpm (946 lpm)
- 2½" discharge
- CE Certified

SM20 PERFORMANCE GRAPH (SM20531, *SM20521)

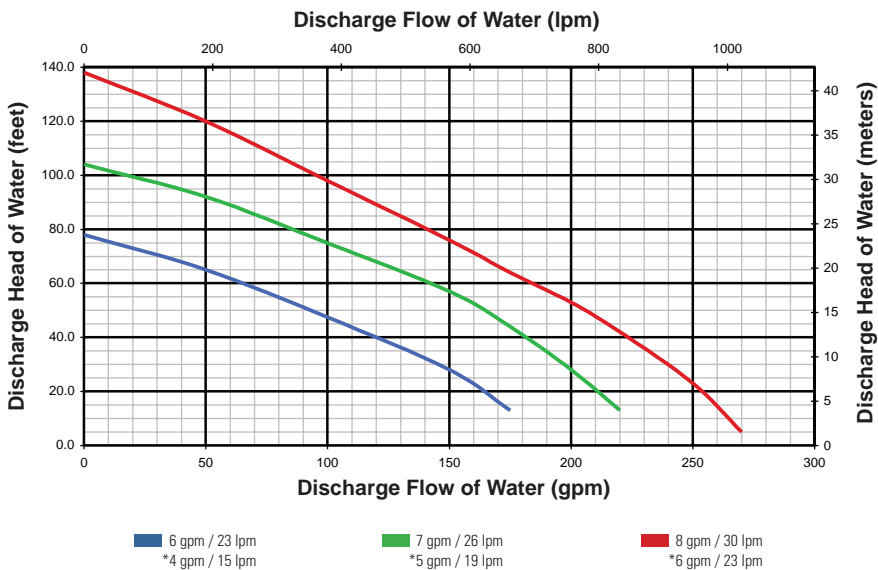

SM20 SUBMERSIBLE PUMP

STANLEY

ORDERING INFORMATION

PART NUMBER

SM2043101	Submersible Pump, 8 gpm, steel impeller, 250 gpm, output, 2½" NPTF, with FF couplers
SM2052101	Submersible Pump, CE, 5 gpm, urethane impeller, 250 gpm, output, 2½" NPTF, with FF couplers
SM2053101	Submersible Pump, CE, 8 gpm, urethane, impeller, 250 gpm, output, 2½" NPTF, with FF couplers

ACCESSORIES

03971	Flush-Face Coupling Set, ¾" NPT
03974	Flush-Face Coupling Set, ½" NPT
06830	Hose Whip 18" long, -8 SAE x ½" NPT
31848	Dual Hose, 50' x ½", with couplers
31972	Dual Hose, 25' x ½", with couplers
58633	Twinned Hose, 25' x ½", with couplers
58634	Twinned Hose, 50' x ½", with couplers
02183	Fire Hose, 25' x 2½" Diameter
02317	Fire Nozzle, 1" Output
05133	2½" Threaded Adapter, Pump to Fire Hose
05134	Fire Hose, 50' x 2½" Diameter
05135	Spanner Wrench for Pin Lug Coupler

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit stanleyhydraulic.com and select the Warranty tab.



Note: The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.